



INTRODUCTION

The FineTek magnetostrictive level transmitter identifies the level of liquids and solutions with high precision and reliability.

This versatile sensor is ideal for continuous level measurement of a wide range of liquids. Application ranges from petrochemical industries, marine and shipping to food and beverage production.

The sensor has a loop power supply and provides direct analog or digital output to the user interface.


The FineTek magnetostrictive level sensor has proven itself due to its durability in a wide range of temperatures, pressures and operating conditions as well as its low maintenance nature.

FEATURES

- Absolute positioning output and no calibration required after power failure.
- Stability and reliability.
- Easy installation without calibration & maintenance.
- Prompt response time, high resolution & high accuracy.
- Durable structure, dust-proof, withstands high pressure.
- Oil/water dual level indication.
- The Max. operation temp. is 195°C.
- EG36, 37, 60 adopted loop power structure for wire saving.
- Explosion-proof model available for hazardous environments.
- IP67(Enclosure)/IP69K(Probe).
- Support HART / RS485 and 4~20mA / voltage output.

APPLICATION

- Liquefied natural gas.
- Crude oil, petroleum's and diesels.
- Chemical processing.
- Pharmaceuticals and medication.
- Food and beverages, breweries.
- Dams, water barriers, wastewater treatment.
- Power plants, marine and shipbuilding.
- Tooling or alignment position for processing machines.

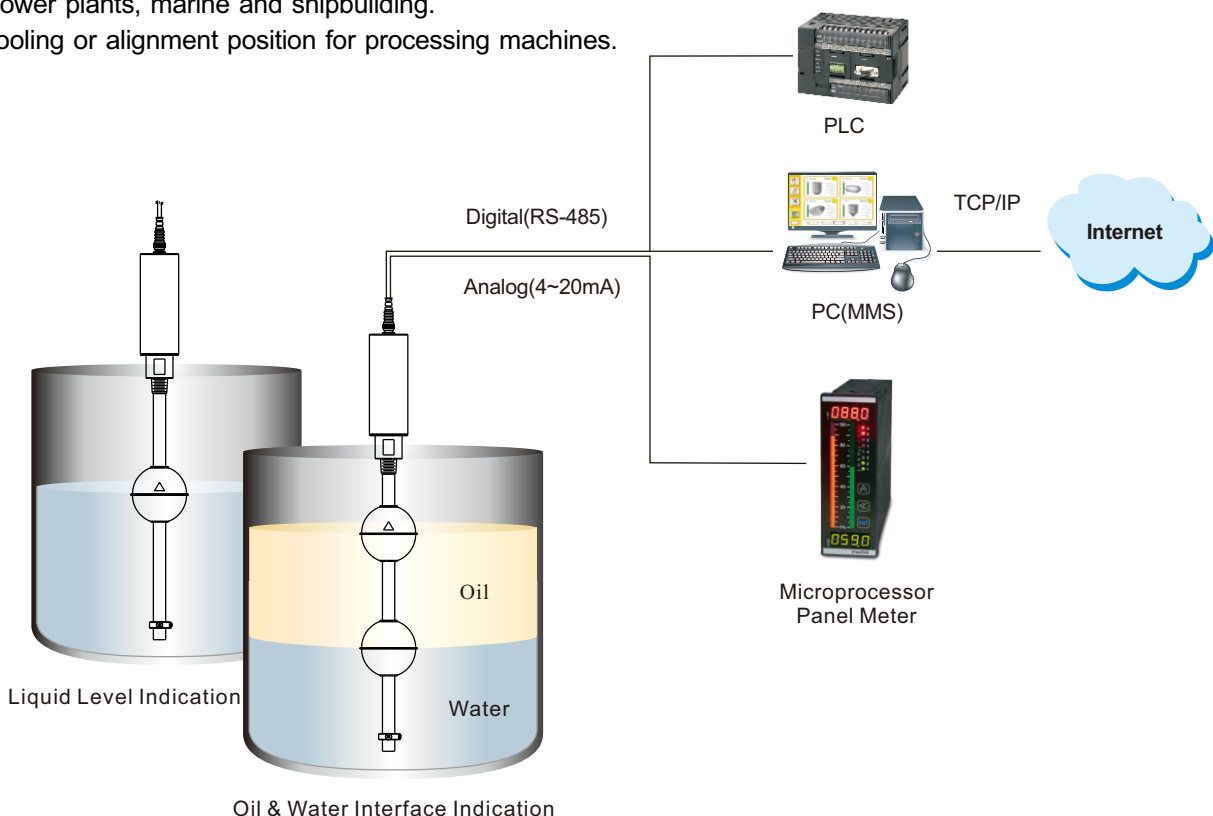

OPERATING PRINCIPLE

The sensor mainly consists of magnetorestrictive wires sealed in a stem/rod and a permanent magnet sealed into a float that can move up and down the stem. Electrical current travels along the wires in the stem creating an axial magnetic field. When the float's and stem's magnetic field intersect, a torsional force is created with different height levels (see right).



The sensor measures the liquid level (D) by calculating the elapsed time between torsional forces. Using velocity and time, distance can be calculated. This action is timely and continuous. A change in float position will be detected promptly via signal output.

CONVERSION FORMULA

The relation of ΔD & 4~20mA output



$$\frac{IX-4}{(20-4)\text{mA}} = \frac{\Delta T - TX}{\Delta T} = \frac{DX}{\Delta D}$$

$$\Rightarrow IX = \frac{16DX}{\Delta D} + 4\text{mA} \quad (\text{The relative current})$$

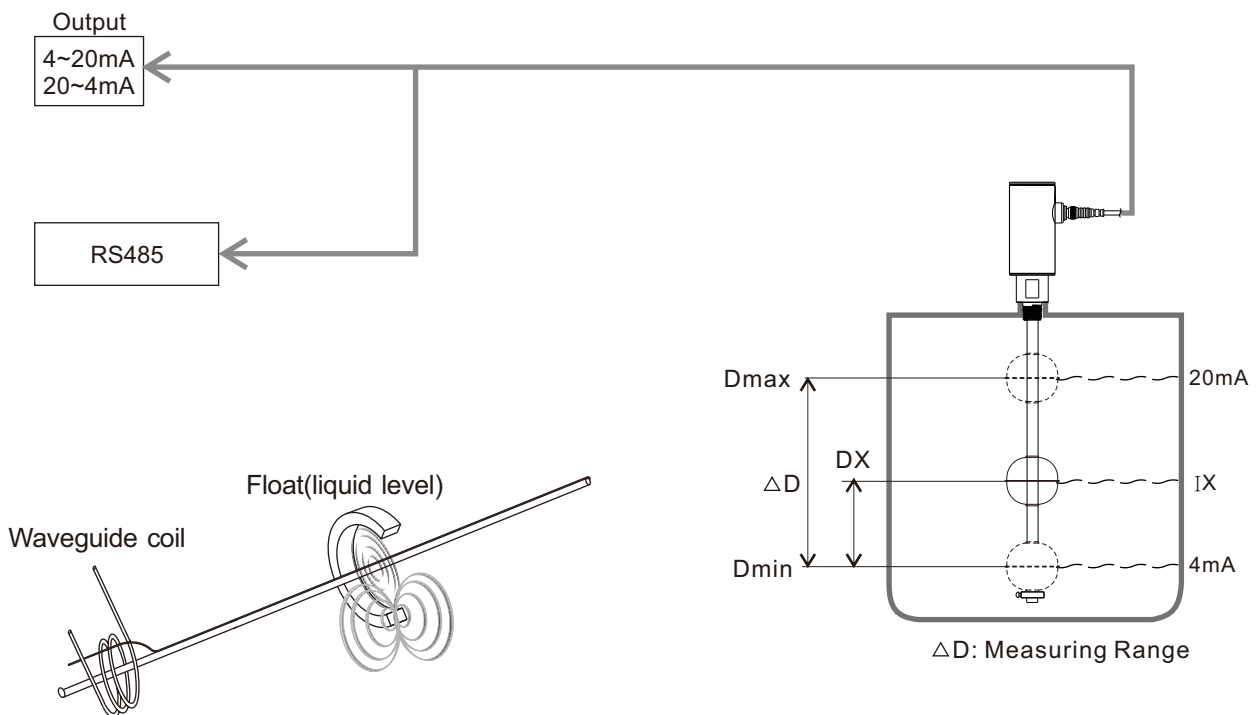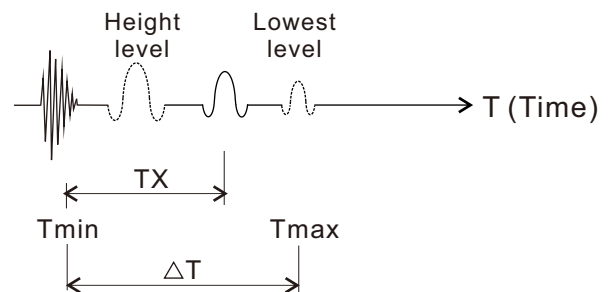

EXPLOSION PROOF MODEL (2 Wire)

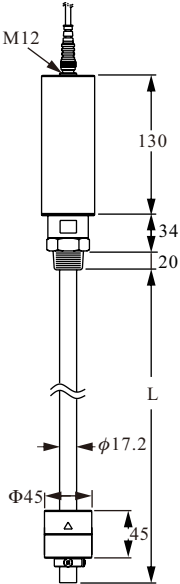
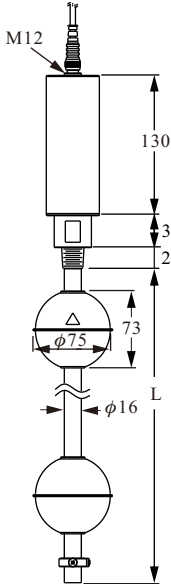


Dimensions (Unit: mm)	 NEPSI Ex ia IIB T3~T6 Ga ATEX II 1G Ex ia IIB T3~T6	 NEPSI Ex ia IIB T3~T6 Ga ATEX II 1G Ex ia IIB T3~T6
Model No.	EG374 (Anti-Corrosion Model)	EG371 (Single/dual Float Model)
Application	Two-wire loop power output, for acid/alkali corrosion liquids.	Two-wire loop power output, for single/dual level and interface measurement.
Measuring range	50~2000mm	50~5500mm
Non-Linearity	± 0.05% F.S. or ± 1.0mm (whichever is greater)	± 0.05% F.S. or ± 1.0mm (whichever is greater)
Repeatability	± 0.004% F.S.	± 0.004% F.S.
Temp. coefficient	± 100 ppm/°C	± 100 ppm/°C
Operation pressure	5 bar(Max.)	30 bar(Max.)
Ambient temp.	-40°C ~ 85°C	-40°C ~ 85°C
Operation temp.	-20°C ~ 80°C	-40°C ~ 125°C
Temp. accuracy	± 1°C	± 1°C
Output	4~20mA / 2 Wire	4~20mA / 2 Wire
Max load (Ω)	(VS-18)÷0.02 VS=Supply voltage	(VS-18)÷0.02 VS=Supply voltage
Digital output	RS485 / HART 7.3(option)	RS485 / HART 7.3(option)
Power supply	12~30V(4-wire), 18~30V(2-wire), 18~28V(Exp Lotion proof)	12~30V(4-wire) ,18~30V(2-wire), 18~28V(Exp Lotion proof)
Housing material	SUS304 (SUS316 option)	SUS304 (SUS316 option)
Connection	3/4"PT	1/2"PT
Wetted material	PP	SUS304
Enclosure	IP67 (Enclosure) / IP69K(Probe)	IP67 (Enclosure) / IP69K(Probe)

※ Must equipped with intrinsic safety barrier to form a standard intrinsically safe system (Ex ia), please refer to another catalog / brochure for TXX safety barrier.

EXPLOSION PROOF MODEL (2 Wire)

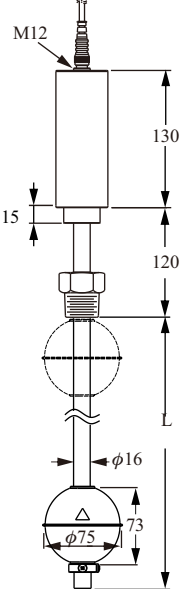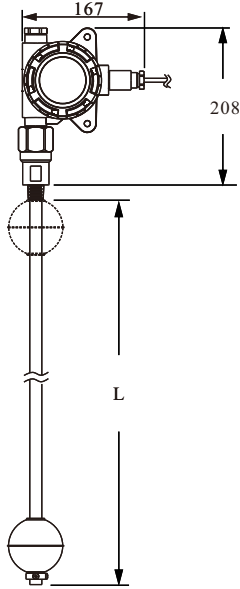


Dimensions (Unit: mm)	 NEPSI Ex ia IIB T3~T6 Ga ATEX Ⓢ II 1G Ex ia IIB T3~T6	 NEPSI Ex ia IIB T3~T6 Ga ATEX Ⓢ II 1G Ex ia IIB T3~T6
Model No.	EG37A (Ex-proof High Temp. Model)	EG36 (Diaplay Model)
Application	Two-wire loop power output, explosion-proof model for hazardous environment.	Two-wire loop power output, explosion-proof model with diaplay for hazardous environment.
Measuring range	50~5500mm	50~5500mm
Non-Linearity	± 0.05% F.S. or ± 1.0mm (whichever is greater)	50mm~4000mm ± 1mm 4000mm~5500mm ± 0.025% F.S.
Repeatability	± 0.004% F.S.	± 0.004% F.S.
Temp. coefficient	± 150 ppm/°C	± 100 ppm/°C
Operation pressure	30 bar(Max.)	30 bar(Max.)
Ambient temp.	-40°C ~ 85°C	-40°C ~ 85°C
Operation temp.	-40°C ~ 195°C	-40°C ~ 125°C
Temp. accuracy	± 1°C	± 1°C
Output	4~20mA / 2 Wire	4~20mA / 2 Wire
Max load (Ω)	$(VS-18) \div 0.02$ VS=Supply voltage	$(VS-16) \div 0.02$ VS=Supply voltage
Digital output	RS485/HART 7.3(option)	RS485/HART 7.3(option)
Power supply	12~30V(4-wire), 18~30V(2-wire), 18~28V(Exp Llosion proof)	12~30V(4-wire) , 16~30V(2-wire), 16~28V(Exp Llosion proof)
Housing material	SUS304 (SUS316 option)	Aluminum
Connection	1/2"PT	1/2"PT
Wetted material	SUS304	SUS304
Enclosure	IP67 (Enclosure) / IP69K(Probe)	IP67 (Enclosure) / IP69K(Probe)

※ Must equipped with intrinsic safety barrier to form a standard intrinsically safe system (Ex ia), please refer to another catalog / brochure for TXX safety barrier.

EG50 (4 Wire)






Dimensions (Unit: mm)	
Model No.	EG50
Application	Four wire output
Measuring range	50~1000mm
Linearity	Range of more than 500mm, error $\pm 0.1\%$ F.S Range of 500mm below the error of $\pm 500\mu\text{m}$
Repeatability	$\pm 0.005\%$ F.S.
Temp. coefficient	± 100 ppm/ $^{\circ}\text{C}$
Operation pressure	30 bar(Max.)
Ambient temp.	$-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
Operation temp.	$-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$
Temp. accuracy	$\pm 0.5^{\circ}\text{C}$
Output	4~20mA / 20~4mA
Max load (Ω)	$(\text{VS}-18) \div 0.02$ VS=Supply voltage
Digital output	RS485 (Option)
Power supply	18~30V
Housing material	SUS304 (SUS316 Option)
Connection	M18x1.5
Wetted material	SUS304(SUS316 Option)
Enclosure	IP67 (Enclosure) / IP69K (Probe)

EG60 (2 Wire / 4 Wire)

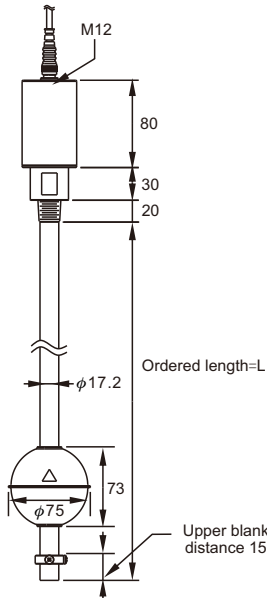Dimensions (Unit: mm)		
Model No.	EG60 Two wire	EG60 Four wire
Application	Two wire loop Power output, comply with HART demand.	Four wire output
Measuring range	50~5500mm	50~2500mm
Linearity	(50~2000mm), 1mm (2001~5500mm), 0.05%F.S	(50~500mm), 0.1mm (50~500mm), 0.2mm (50~500mm), 0.5mm (500~2500mm), 0.02%F.S (500~2500mm), 0.05%F.S (500~2500mm), 0.1%F.S
Repeatability	± 0.002% F.S.	
Temp. coefficient	± 100 ppm/°C	
Operation pressure	30 bar(Max.)	
Ambient temp.	-40°C~ 85°C	
Operation temp.	-40°C ~ 125°C (Std. model) , -40~195°C (High temp. model)	
Temp. accuracy	± 0.5°C	
Output	4~20mA/ 20~4mA	0~10V, 10~0V, 0~5V, 5~0V, 4~20mA, 20~4mA
Max load (Ω)	(VS-18)÷0.02 VS=Supply voltage	500Ω
Digital output	RS485, HART (Option)	RS485 (Option)
Power supply	18~30V	
Housing material	SUS304 (SUS316 Option)	
Connection	1/2"PT	
Wetted material	SUS304	
Enclosure	IP67 (Enclosure) / IP69K (Probe)	




HOUSING OPTIONS

Mapping Table Of Enclosure

EG37 Explosion-proof (2 wire)	1 Top conduit	2 Side conduit
		
EG50 Four wire	1 Top conduit	
		
EG60 Two wire & Four wire	1 Top conduit	2 Side conduit
		

※ Standard model cable length is 2m.

FLOAT SPECIFICATIONS

Model	Model Number	Dimensions ($\phi A \times B \times \phi C$ mm)	S.G.	Max. Pressure (kg/cm ²)	Material	Stem Size
	S5	75x73x20.5	E>0.7	30	SUS 304 / 316	$\phi 16$
	S4	52x52x15	E>0.75	30	SUS 316	$\phi 12.7$
	SD	52x52x15	E>0.9	30	SUS 316	$\phi 12.7$
	SE	75x73x20.5	E>0.9	20	SUS 304 / 316	$\phi 16$
	A1	32x69x10.9	E>0.75	10	SUS 316 / 316L	$\phi 8$
	AA	32x69x10.9	E>0.9	10	SUS 316 / 316L	$\phi 8$
	S3	45x55x15	E>0.7	12	SUS 316	$\phi 12.7$
	SC	45x55x15	E>0.9	12	SUS 316	$\phi 12.7$
	F3	45x45x20	E>0.65	5	PP in Grey	$\phi 18$ (coating)
	FC	45x45x20	E>0.9	5	PP in Grey	$\phi 18$ (coating)
	P3	48x45x18.5	E>0.6	5	PP in Black	$\phi 17.2$ (coating)
	PC	48x45x18.5	E>0.9	5	PP in Black	$\phi 17.2$ (coating)
	NB	48x46x15.6	E>0.5	30	NBR in Black	$\phi 12.7$
	ND	48x46x15.6	E>0.9	30	NBR in Black	$\phi 12.7$
	NC	48x46x20	E>0.5	30	NBR in Black	$\phi 16$
	NE	48x46x20	E>0.9	30	NBR in Black	$\phi 16$

※ S.G(E):specific gravity

※ Probe diameter must be smaller then float's hole diameter.


WIRING

When RS485(ModBus)is applied,Loop power only as power.


EG37 / EG60 (2 wire):

1. Single / Double float +RS485


Loop Power 24Vdc $\pm$ 10%

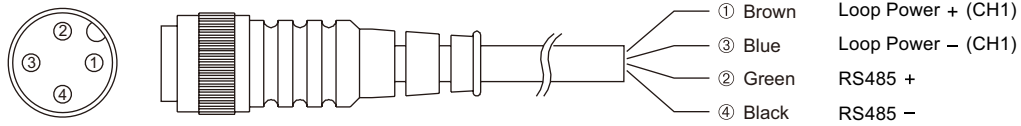

2. Single / Double float +HART

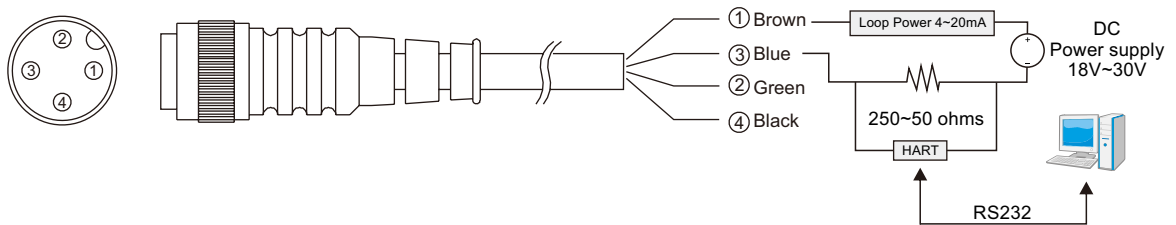

EG36:




CUSTOMIZED STEM LENGTHS ARE AVAILABLE

Note the difference between ordered length and actual measurable stem length below.

Below 2m, stem $\phi 12.7$

(2m below) = Actual measurable length (X) =


Ordered length (L) - Float length(52mm) - Blanking zone(15mm), adopted stem $\phi 12.7$

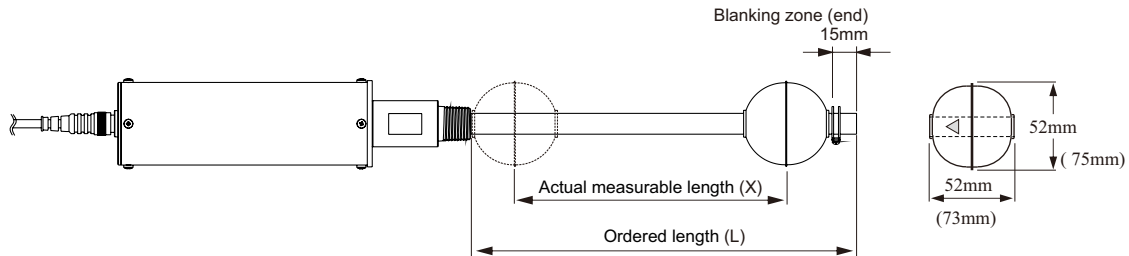

Above 2m, stem $\phi 16$

(2m above) = Actual measurable length (X) =


Ordered length (L) - Float length(73mm) - Blanking zone(15mm), adopted stem $\phi 16$

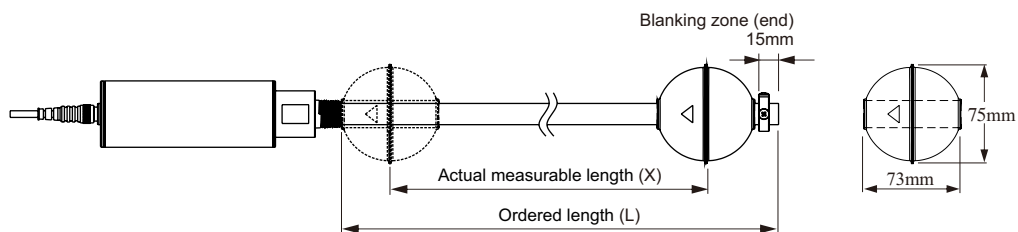

Below 2m, stem $\phi 12.7$, with PP coating to $\phi 17.2$

(2m below) = Actual measurable length (X) =

Ordered length (L) - Float length(45mm) - Blanking zone(15mm), adopted stem $\phi 17.2$

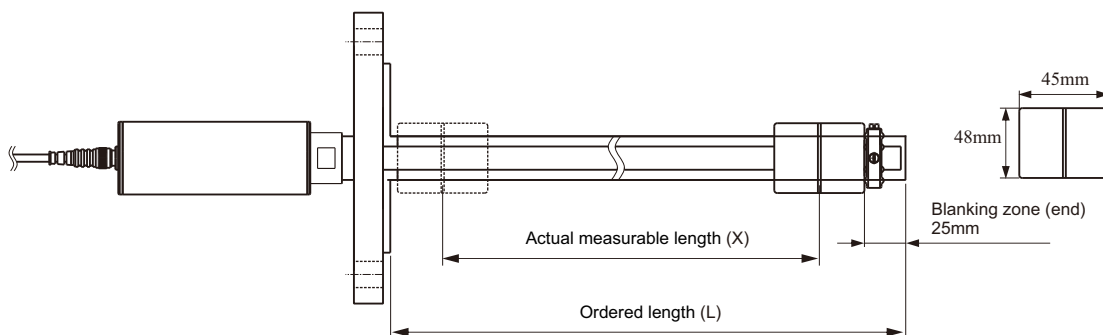


INSTALLATION


1. Loop power 24Vdc $\pm 10\%$
2. The product is calibrated before shipment and should be sufficient to meet user needs.
3. Do not bend the stem, put pressure on it or force it in any manner.
4. For best results, use the included float only.
5. When the mounting hole is large enough, guide the stem and float through the hole to install.
6. If the hole is NOT large enough, remove float, install the stem and assemble float from inside the container.
7. When assembling the float onto the stem, the float's direction mark should face the housing.
8. Ensure the float stopper is fixed firmly.
9. If the stem is bent and can not work, it needs to be returned to the factory for calibration.
11. Bubble wrap/foam packaging is necessary to ensure safety during transportation.
12. Unnecessary opening of housing may affect accuracy.

Removing The Float


Step 1:
Loosen the stopper at stem end

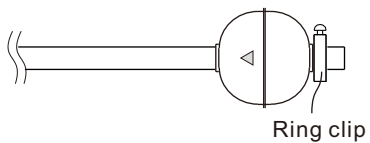


Step 2:
Take off the float




Step 3:
Install the sensor onto the tank,
and tighten the connection

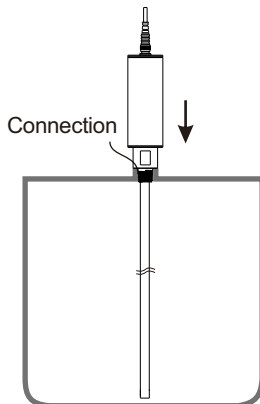

Step 4:
Assemble the float onto the stem
and tighten the connection the
housing. Note the direction of float

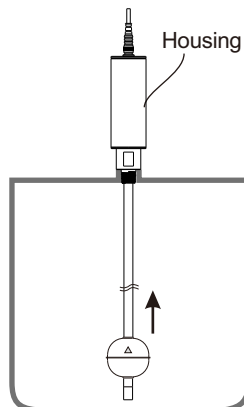

Step 5:
Firmly fasten the stopper

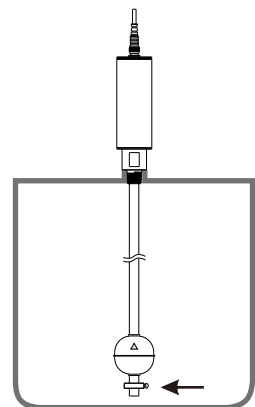

MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
EG374 Anti-Corrosion type	EGX1001B-B1
EG371 Ex- Proof type	EGX1001B-A1
EG37A Ex- Proof High temperature type	EGX1021B-A1
EG36 Display type	EGX3001B-A1
EG36 High temperature display type	EGX3021B-A1
EG50	EGX5 □□□□-□□
EG60	EGX6 □□□□-□□

ORDER INFORMATION

EGX	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33

04 Version

1: 132mm (EG37)
 3: Display type (EG36)
 5: EG50

05 06 Model

00: Standard
 02: Hi-temperature
 03: Sanitary

07 08 Certification

00: None
 1B: ATEX-Exia
 7B: NEPSI-Exia

09 10 Sensor Type

A1: Probe type
 B1: Anti-Corrosion probe type

Connection

11 12

Flange item
 AI : 3A
 AK: JIS-FF
 AN: ANSI-RF
 AS: DIN-FF

Thread item

AA: JIS
 AB: ISO
 AC: ANSI

13 14

A5: 1/2"
 A7: 3/4"
 A8: 1"
 B1: 1-1/2"
 B2: 2"
 B4: 2-1/2"
 D7: DN20
 D8: DN25
 D9: DN32
 E1: DN40
 E2: DN50
 E3: DN65
 19: M18

15 16

01: PT male
 03: PF male
 07: NPT male
 15: UNF male
 40: 5 kg/cm²
 42: 10 kg/cm²
 48: 150 Lbs
 49: 300 Lbs
 57: PN10
 58: PN16
 82: (P)1.5 male

(Next page)

(17) (18) Probe diameter _____

(Next page)

MA: SUS 304
MB: SUS 316
MC: SUS 316L
18: PP coating

Code	Dimension	Material	S.G
00	None	None	None
S3	45*55*15	SUS316	E>0.7
SC	45*55*15	SUS316	E>0.9
S4	52*52*15	SUS316	E>0.75
SD	52*52*15	SUS316	E>0.9
NB	48*46*15.6	NBR Black	E>0.5
ND	48*46*15.6	NBR Black	E>0.9
F3	45*45*20	PP Gray	E>0.65
FC	45*45*20	PP Gray	E>0.9
P3	48*45*18.5	PP Black	E>0.6
PC	48*45*18.5	PP Black	E>0.9
NC	48*46*20	NBR Black	E>0.5
NE	48*46*20	NBR Black	E>0.9
S5	75*73*20	SUS304/316	E>0.7
SE	75*73*20.5	SUS304/316	E>0.9
A1	32*69*10.9	SUS316/316L	E>0.75
AA	32*69*10.9	SUS316/316L	E>0.9
B1	32.8*8*13.5	Aluminum	None

Code	Dimension	Material	S.G
00	None	None	None
SC	45*55*15	SUS316	E>0.9
SD	52*52*15	SUS316	E>0.9
ND	48*46*15.6	NBR Black	E>0.9
FC	45*45*20	PP Gray	E>0.9
PC	48*45*18.5	PP Black	E>0.9
NE	48*46*20	NBR Black	E>0.9
SE	75*73*20.5	SUS304/316	E>0.9
AA	32*69*10.9	SUS316/316L	E>0.9

EGX

※ Max. probe length for EG5 is 1000m.



EGX

MA: SUS 304
MB: SUS 316
MC: SUS 316L
18: PP coating

②① ②② Float 1

②③ ②④ Float 2

②⑤ Input

A: 2 wire
B: 4 wire

Global Network



■ Head Quarter

● Taiwan

FineTek Co., Ltd. - Taipei Head Quarter 
No.16, Tzuchiang St., Tucheng Industrial Park
New Taipei City 236, Taiwan
TEL: 886-2-2269-6789
FAX: 886-2-2268-6682
EMAIL: info@fine-tek.com

■ North America

● California, U.S.

Aplus Finetek Sensor Inc. - US Office
355 S. Lemon Ave, Suite D
Walnut, CA 91789
TEL: 1 909 598 2488
FAX: 1 909 598 3188
EMAIL: info@aplustek.com

■ Europe

● Germany

FineTek GmbH - Germany Office
Bei den Kämpen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-12
FAX: +49-(0)4185-8083-80
EMAIL: info@fine-tek.de

■ Asia

● China

Fine automation Co., Ltd. - Shanghai Factory 
No.451 DuHui Rd, MinHang District, Shanghai,
China 201109
TEL: 86-21-6490-7260
EMAIL: info.sh@fine-tek.com

● Singapore

FineTek Pte Ltd. - Singapore Office
37 Kaki Bukit Place, Level 4 Singapore 416215
TEL: 65-6452-6340
EMAIL: info.sg@fine-tek.com

● Indonesia

PT. FineTek Automation Indonesia - Indonesia Office 
PERGUDANGAN TUNAS BITUNG
JL. Raya Serang KM. 13,8, Blok C3 No. 12&15, Bitung Cikupa,
Tangerang 15710
TEL: 62 (021)-2958-1688
EMAIL: info.id@fine-tek.com



Distributor: